

# Analyzing the non-linear effects and minimizing the dispersion of Elliptical cum Circular shaped Borosilicate Crown Glass Photonic Crystal Fiber

Ronak Trivedi<sup>1\*</sup>, Anurag Paliwal<sup>2</sup>, Sunil Sharma<sup>3</sup>

<sup>1</sup>Geetanjali Institute of Technical Studies, Udaipur, India

<sup>2</sup>Department of ECE, GITS, Udaipur, India

<sup>3</sup>Department of ECE, Pacific University, Udaipur, India

(ronaktrivedi41@gmail.com, paliwal\_rajasthan@yahoo.com, ersharma.sunil@gmail.com)

**Abstract-** The proposed design of Borosilicate crown glass photonic crystal fiber is for minimizing the chromatic dispersion to low level. The Finite Difference Time Domain (FDTD) method along with the transparent boundary condition (TBC) is used for preparation of this design. This method is bringing to produce zero dispersion at 0.5 $\mu$ m to 1.5 $\mu$ m diameter of circular and elliptical air holes. Such PCF have high potential to be used as a dispersion compensating fiber in optical window. The refractive index is calculated with this method is equal to the conventional Borosilicate crown glass i.e. 1.534. The proposed design is also used to show the non-linear effects of the material used.

**Keywords:** Photonic Crystal Fiber (PCF), Chromatic Dispersion, Transparent Boundary Condition (TBC), FDTD (Finite Difference Time Domain).

## 1. Introduction

Since its invention in the early 1970s, the use of and demand for optical fiber have grown tremendously. Fiber optics is a major building block in the telecommunication infrastructure. Its high bandwidth capabilities and low attenuation characteristics make it ideal for gigabit transmission and beyond. The field of fiber optics, especially with respect to telecommunication, is a rapidly changing world in which, seemingly, each day a new product or technology is introduced. A good way to start learning about this field is to research the companies that are making major strides in this industry. Optical fiber transmission uses wavelengths that are in the near-infrared portion of the spectrum, just above the visible, and thus undetectable to the unaided eye. Since we know that Borosilicate Crown Glass fiber is well under all chemical examinations [1], typical optical transmission wavelengths are 950 nm, 1310 nm, and 1550 nm. The basis of the FVEIM development for the parameter assessment is the inclusion of the anisotropic Perfectly Matched Layers (PMLs) which has the ability to manage several modes as needed and evaluate the leaky modes [2].

### 1.1. Fiber Optic System Design Considerations


When designing a fiber optic communication system some of the following factors must be taken into consideration:

- Which modulation and multiplexing technique is best suited for the particular application? [3]
- Is enough power available at the receiver (power budget)?
- Rise-time and bandwidth characteristics
- Noise effects on system bandwidth, data rate, and bit error rate
- Are erbium-doped fiber amplifiers required?
- What type of fiber is best suited for the application?
- Cost
- Design structure
- Dispersion
- Confinement Loss
- Refractive Index profile

Among all these parameters here we have consider Dispersion, confinement loss, refractive index and design structure for the proposed work.


## 2. Proposed Structure

The proposed structure is designed by considering various parameters like air hole diameter is varying from  $0.5 \mu\text{m}$  to  $1.5 \mu\text{m}$  range. The air hole spacing i.e. pitch is maintaining at  $2 \mu\text{m}$  for nine-layer structure.

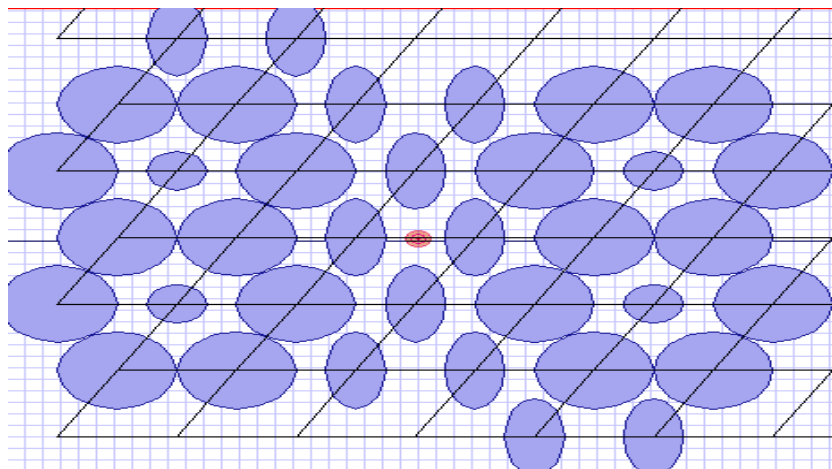


**Figure 1.** Proposed structure of Borosilicate crown glass

This proposed structure is used to minimize dispersion along with maintaining refractive index equal to the Borosilicate crown glass material i.e. 1.534.

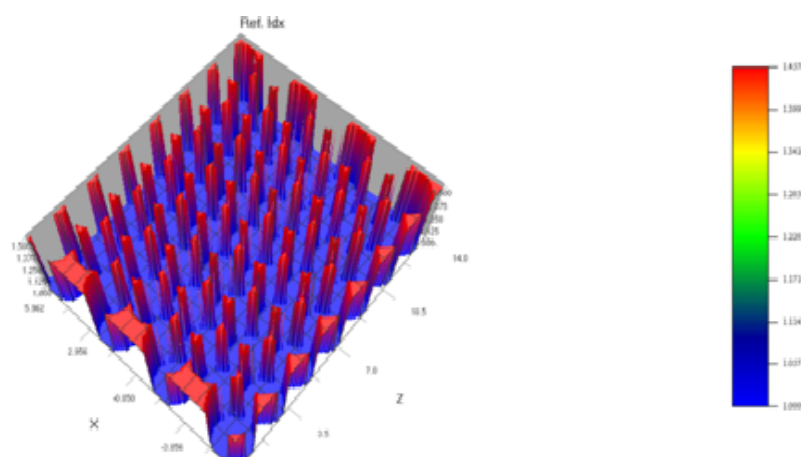

**Figure 2.** 2D structure of proposed design

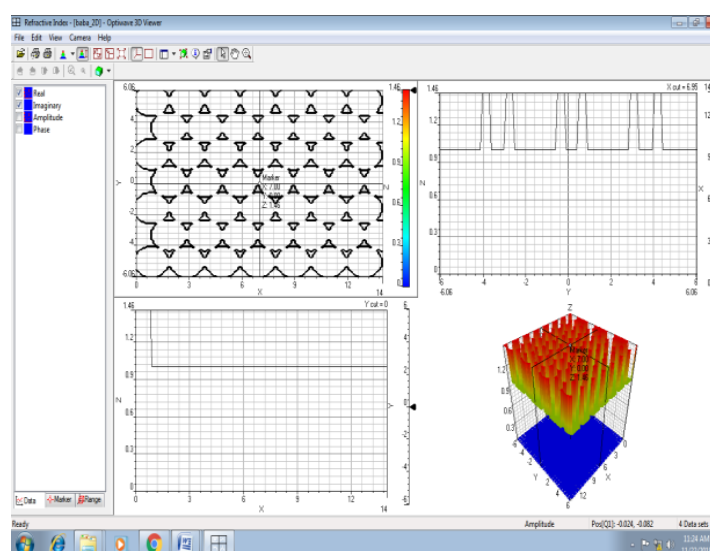

**Figure 3.** 3D viewer of amplitude variation of proposed design

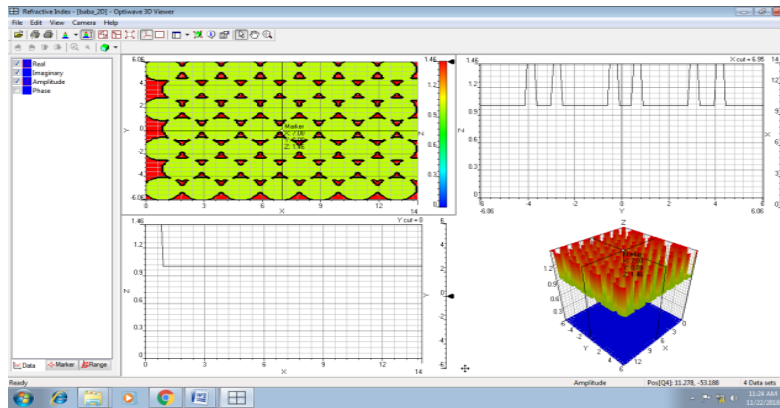


Figure 4. 3D Real view of proposed design

Various mode filled designs have been obtained to show the variation of Refractive index of Borosilicate crown glass with the proposed structure.

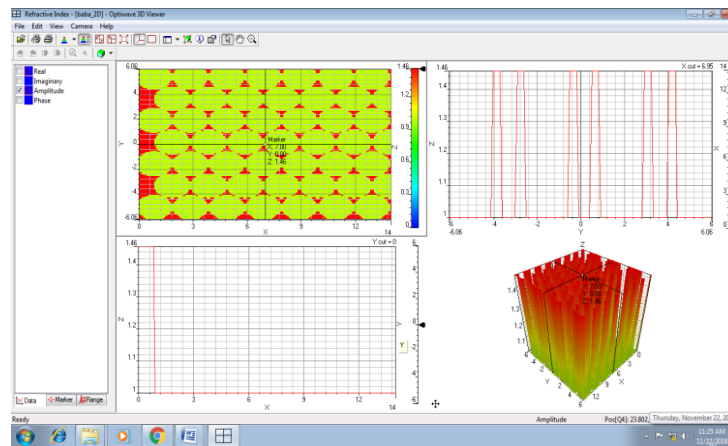


Figure 5. 3D viewer of phase variation of proposed design

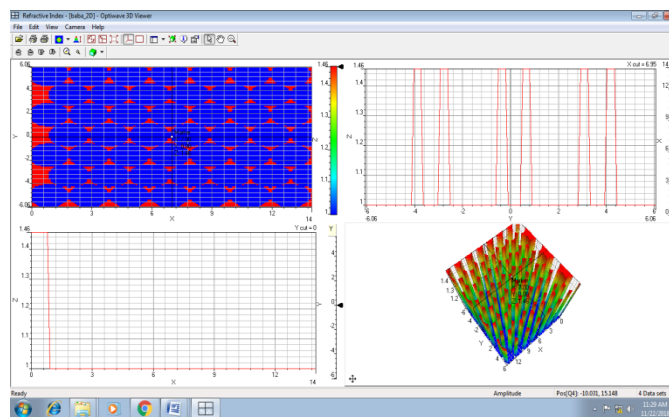


Figure 6. 3D imaginary view of proposed design

Above figure no. 3, 4, 5, and 6 shows the various 3 D viewer of the proposed structure but with varying parameters. All the above-mentioned figures are showing changes with respect to change in dimensions and parameters selections. They also show variation in the amplitude and phase accordingly.

### 3. Mathematical Explanation

Inside a dielectric, the time independent Maxwell curl equations with a positive time convention ( $e^{j\omega t}$ ) are

$$\nabla \times \mathbf{E} = -j\omega\mu_0\mathbf{H} \quad \nabla \times \mathbf{H} = j\omega\epsilon_0\epsilon\mathbf{E} \quad (1)$$

and the divergence equations are

$$\nabla \cdot (\epsilon \mathbf{E}) = 0 \quad \nabla \cdot \mathbf{H} = 0 \quad (2)$$

In the magnetic formulation, the electric field is eliminated from (1) by taking the curl of the second equation and substituting from the first. For regions of constant permittivity  $\epsilon$ , there are no gradients of  $\epsilon$ , and the equation simplifies to

$$\nabla \times \nabla \times \mathbf{H} = \omega^2 \mu_0 \epsilon_0 \epsilon \mathbf{H} \quad (3)$$

In view of the vector identity  $\nabla \times \nabla \times \mathbf{A} = \nabla(\nabla \cdot \mathbf{A}) - \nabla^2 \mathbf{A}$ , and the property of  $\mathbf{H}$  having zero divergence, (3) becomes


$$\nabla^2 \mathbf{H} + k^2 \epsilon \mathbf{H} = 0 \quad (4)$$

Where  $k = \omega \sqrt{\mu_0 \epsilon_0}$  is the free space wave number.

It is true that it is usually the electric field, and not the magnetic field, that is of interest for applications. The motivation for solving the problem with a magnetic formulation is that the waveguide structure is created by introducing discontinuities in electric permittivity, and not magnetic permeability,  $\mu$ . When matching boundary conditions at layer boundaries, the normal component of the electric field is discontinuous, since it is the electric displacement,  $\mathbf{D} = \epsilon \mathbf{E}$ , and not the electric field that is to be made continuous.[4].


#### 4. Results & Discussions:

For the proposed structure of Borosilicate crown glass fiber the dispersion is so obtained and a graph is plotted for the design which shows that it is zero for the selected diameter range. The variation of dispersion is shown below in figure 7.

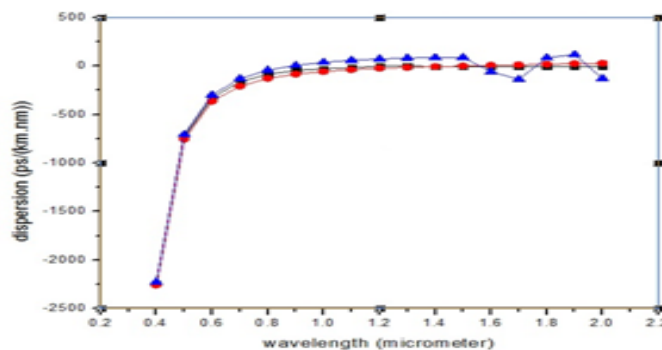

**Figure 7.** Dispersion obtained of proposed design


The above graph shows that the dispersion obtained for proposed structure is wquivalent to zero among the diameter region selected. It is shown clearly that it may vary for varying diameter.

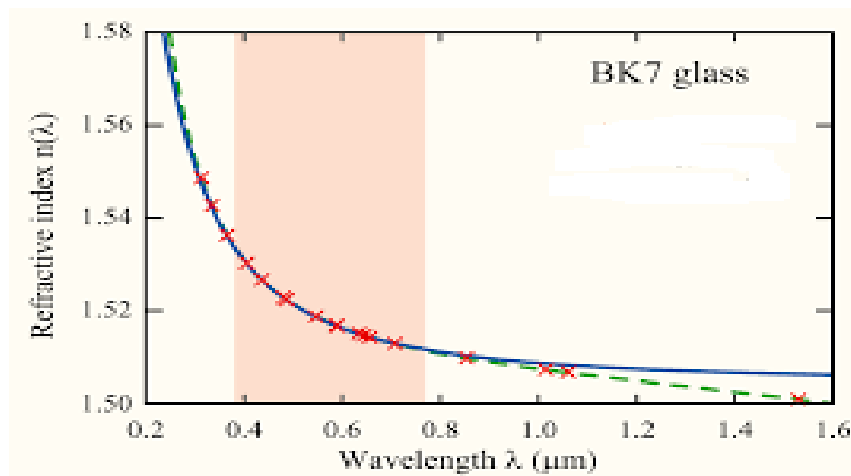

**Figure 8.** Refractive index

The refractive index profile of the proposed structure is obtained and plotted in a graph which shows that it is quite similar to the Borosilicate crown glass i.e. 1.534. It is shown above in the figure 8

The transmission curve of the proposed structure is shown below in figure 9.

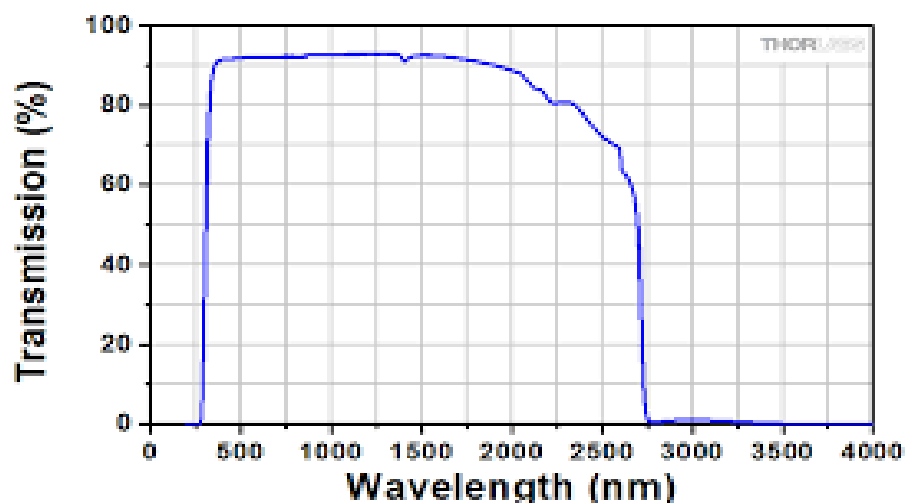

**Figure 9.** Transmission curve of proposed design

This transmission curve shows that the signal can propagate without loss in the selected wavelength region. Below and above this region the signal can degrade, which can be shown by the figure shown above.

## 5. Conclusion

The fiber parameters are optimized to yield best agreement with available data. The discrepancy observed at higher wavelength values is due to the fact that the refractive index of the material and the effective cladding index are wavelength dependent. It is also observed that Borosilicate crown glass PCF provides much better dispersion results as compared to other of the same structure and parameters.

## References

- [1] Sunil Sharma, Ravindra Kumar Sharma, Kirti Vyas, Dr. Lokesh Tharani, "Analysis And Study Of Refractive Index Of Different Types Of Pcf Core Materials", 33rd Indian Engineering Congress, The Institution of Engineers (India), December-2018.
- [2] Heema Kumari Tejjyot, Sunil Sharma, "Design To Analyze Low Loss Zero Dispersion In Water Filled Silica Photonic Crystal Fiber", ICMETE 2<sup>nd</sup> IEEE International Conference on Micro-Electronics and Telecommunication Engineering September-2018
- [3] Sunil Sharma, Ravindra Kumar Sharma, Kirti Vyas, "Novel Design of Honeycomb Photonic Crystal Fiber with nearly zero flattened Chromatic Dispersion", ICCSP 13.

- [4] Vineet Agrawal, Ravindra Kumar Sharma, Ashish Mittal, "Designing The Properties of Zero Dispersion Photonic Crystal Fiber With Concentric Missing Ring" IJECT vol.- 4, Issue Spl - 4, Pp88-90, April - June 2013.
- [5] S.S. Mishra And Vinod Kumar Singh, "Comparative Study Of Fundamental Properties Of Honey Comb Photonic Crystal Fiber At 1.55 $\mu$ m Wavelength", *Journal Of Microwaves, Optoelectronics And Electromagnetic Applications*, Vol.-10, No. 2, Pp 343-354 December 2011.
- [6] D. Chen Y, M.-L. V. Tse, And H. Y. Tam, "Optical Properties of Photonic Crystal Fiber With A Fiber Core Of Arrays Of Sub- Wavelength Circular Air Holes: Birefringence And Dispersion", *Progress In Electromagnetics Research M*, Vol.-105, 193-212, 2010.
- [7] Nihal Areed, "Ultra-Flattened Dispersion Honeycomb Lattice Photonic Crystal Fiber", *International Conference: Sciences of Electronic, Technologies of Information and Telecommunications*, March, 2009.
- [8] M. Delgado-Pinar<sup>1</sup>, A. Díez<sup>1</sup>, S. Torres-Peiró<sup>1</sup>, M. V. Andrés<sup>1</sup>, T. Pinheiro-Ortega<sup>2</sup>, and E. Silvestre, "Waveguiding Properties Of A Photonic Crystal Fiber With A Solid Core Surrounded By Four Large Air Holes", *Optical Society Of America/ Optics Express/ Vol.-17, No. 9/ 27 April 2009*.
- [9] Guangyu Xu, Wei Zhang, Yidong Huang, Jiangde Peng, "Optical Properties Of Solid Core Honeycomb Photonic Crystal Fiber With Different Doping Levels", *Proc. of SPIE vol. 6025, 2006*.
- [10] R . K . Sinha and Anshu D. Varshney, "Dispersion Properties of Photonic Crystal Fiber: Comparison by Scalar and Fully Vectorial Effective Index Methods", *Optical and Quantum Electronics* (2005), pp 711–722, Springer 2005.
- [11] Takeshi Fujisawa and Masanori Koshiba, "Finite Element Characterization of Chromatic Dispersion in Nonlinear Hole Fibers", *Optical Society of America/ Optics Express/ Vol. 11, No. 13/30 June 2003*.
- [12] K. Saitoh, M. Koshiba, T. Hasegawa And E. Sasaoka, "Chromatic Dispersion Control in Photonic Crystal Fibers: Application to Ultra-Flattened Dispersion", *Optical Society Of America/ Optics Express / Vol.-11, No. 8 / Pp 843-852/21 April 2003*.
- [13] R . K . Sinha and Anshu D. Varshney, "Dispersion Properties of Photonic Crystal Fibers" *Microwave and Optical Technology Letters / Vol.-37, No. 2, pp -129-132, April 20 2003*.
- [14] J. C. Knight, J. Arriaga, T. A. Birks, "Anomalous Dispersion in Photonic Crystal Fiber", *IEEE Photonics Technology Letters*, Vol. 12, No. 7, pp 807-809, July 2000.
- [15] A. Ferrando, E. Silvestre, J. J. Miret, And P. Andres, "Nearly Zero Ultra flattened Dispersion In Photonic Crystal Fibers", *Optics Letters / Vol. 25, No. 11 / Pp 790-792 June 1, 2000*.
- [16] D. Chen Y, M.-L. V. Tse, And H. Y. Tam, "Super-Lattice Structure Photonic Crystal Fiber", *Progress In Electromagnetics Research M*, Vol. 11, 53-64, 2010.
- [17] Tadeusz Martynkien, Gabriela Statkiewicz-Barabach, Jacek Olszewski, Jan Wojcik, Paweł Mergo, Thomas Geernaert, Camille Sonnenfeld, Alicja Anuszkiewicz, Marcin K. Szczurowski, Karol Tarnowski, Mariusz Makara, "Highly Birefringent Microstructured Fibers With Enhanced Sensitivity To Hydrostatic Pressure" *Optical Society Of America/ Optics Express / Vol. 18, No. 14 / 5 July 2010* .
- [18] Vijay Janyani, Neetu Joshi, Jigyasa Pagaria, and Parul Pathak, "Photonic Crystals for Novel Applications in Integrated-Optic Communication Systems and Devices", *World Academy of Science, Engineering and Technology* 54 2009.
- [19] N. Nozhat And N. Granpayeh, "Specialty Fibers Designed By Photonic Crystals", *Progress In Electromagnetic Research*, Pier 99, 225-244, 2009.
- [20] Philip S. Light, François Couny, Ying Ying Wang, Natalie V. Wheeler, P. John Roberts, And Fetah Benabid, "Double Photonic Bandgap Hollow-Core Photonic Crystal Fiber", *Optical Society Of America/ Optics Express/ Vol. 17, No. 18 /31 August 2009*.